




45 SERIES CURTAINWALL WIND LOAD CHARTS

E8



D4510


- ① - 1.92 kPa (40 PSF)
- ② - 1.68 kPa (35 PSF)
- ③ - 1.44 kPa (30 PSF)
- ④ - 1.20 kPa (25 PSF)
- ⑤ - .96 kPa (20 PSF)
- ⑥ - .72 kPa (15 PSF)

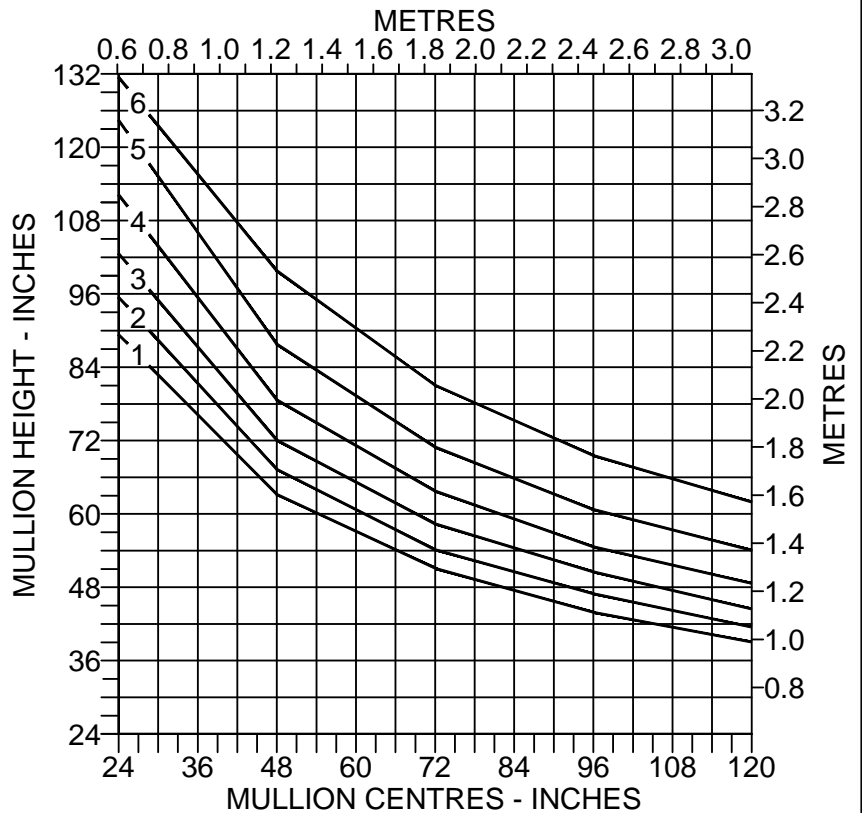

D4510


(C/W 1 1/2" X 1 1/2" X 1/8"
HSS STEEL INSERT

DEFLECTION CRITERION: L/175
OR L/240+1/4"

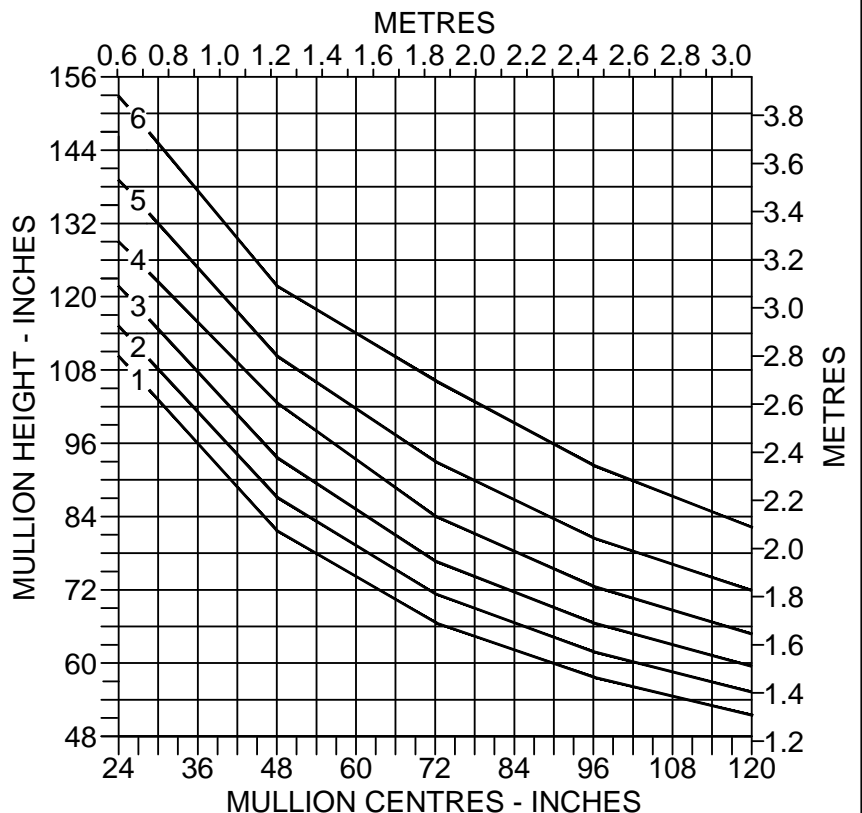



45 SERIES CURTAINWALL WIND LOAD CHARTS

E9

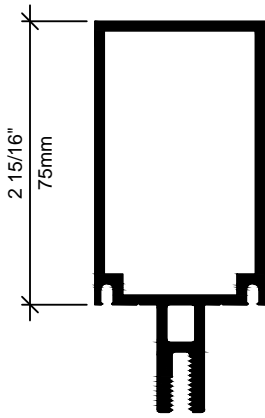


D4520

- ① - 1.92 kPa (40 PSF)
- ② - 1.68 kPa (35 PSF)
- ③ - 1.44 kPa (30 PSF)
- ④ - 1.20 kPa (25 PSF)
- ⑤ - .96 kPa (20 PSF)
- ⑥ - .72 kPa (15 PSF)

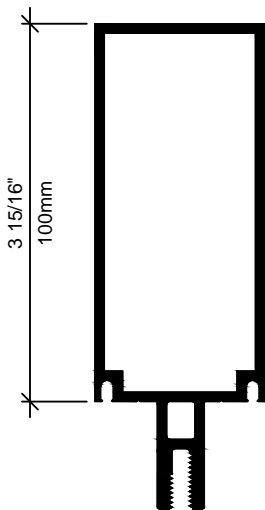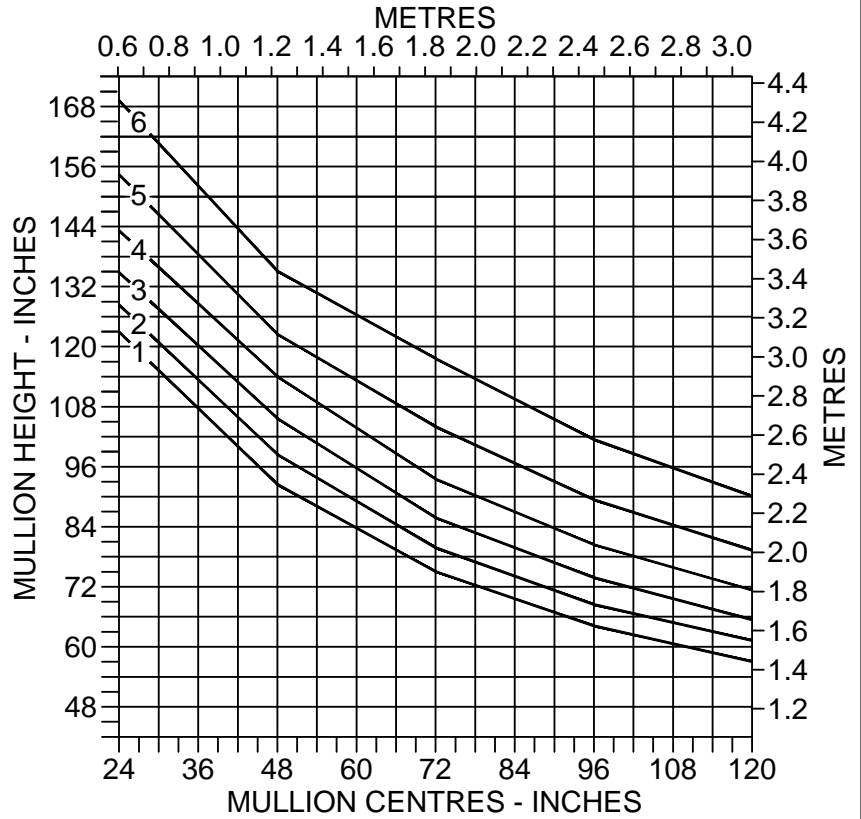

D4530


DEFLECTION CRITERION: $L/175$
OR $L/240 + 1/4"$

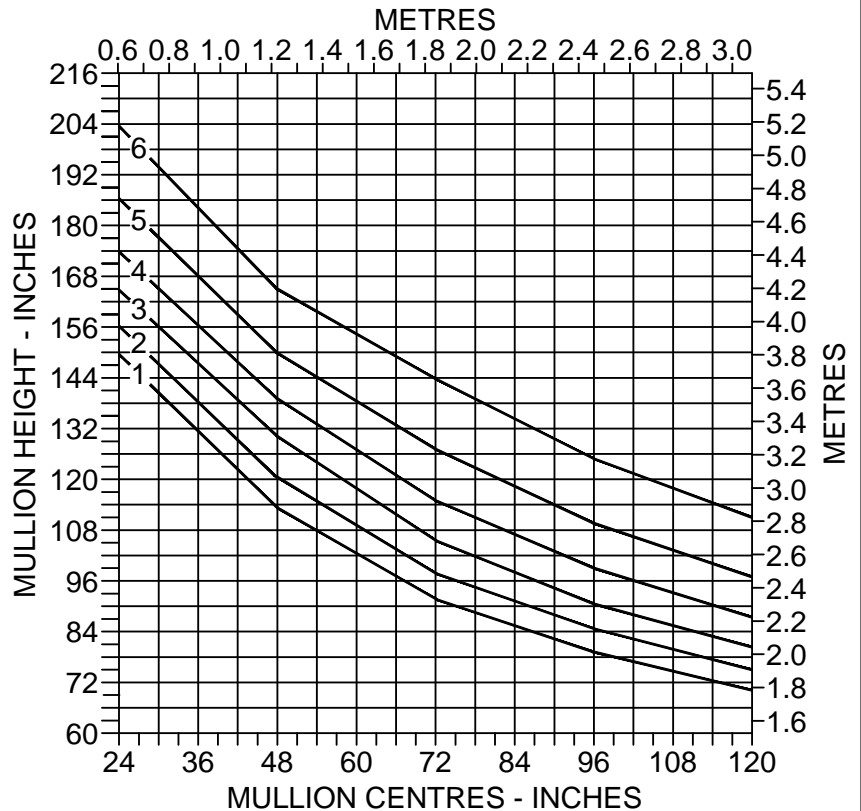

providing innovative solutions that meet client needs.


45 SERIES CURTAINWALL WIND LOAD CHARTS

E10

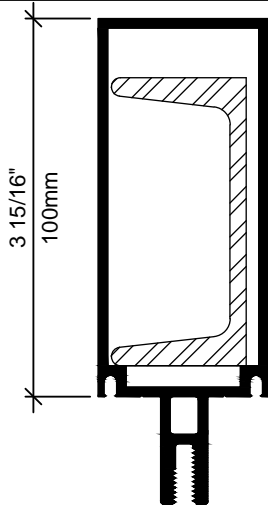



(C/W C3 X 4.1)
D4530

- ① - 1.92 kPa (40 PSF)
- ② - 1.68 kPa (35 PSF)
- ③ - 1.44 kPa (30 PSF)
- ④ - 1.20 kPa (25 PSF)
- ⑤ - .96 kPa (20 PSF)
- ⑥ - .72 kPa (15 PSF)

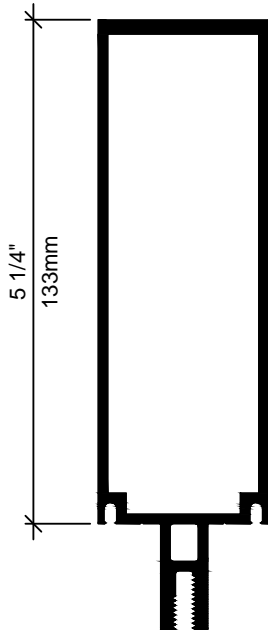

D4540


DEFLECTION CRITERION: L/175
OR L/240+1/4"

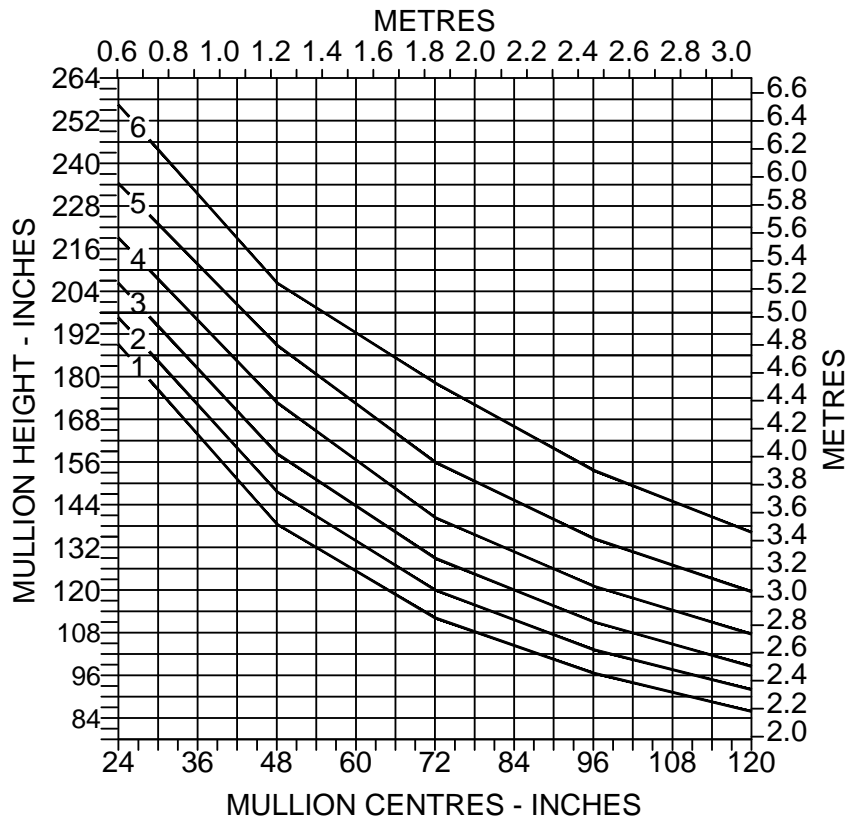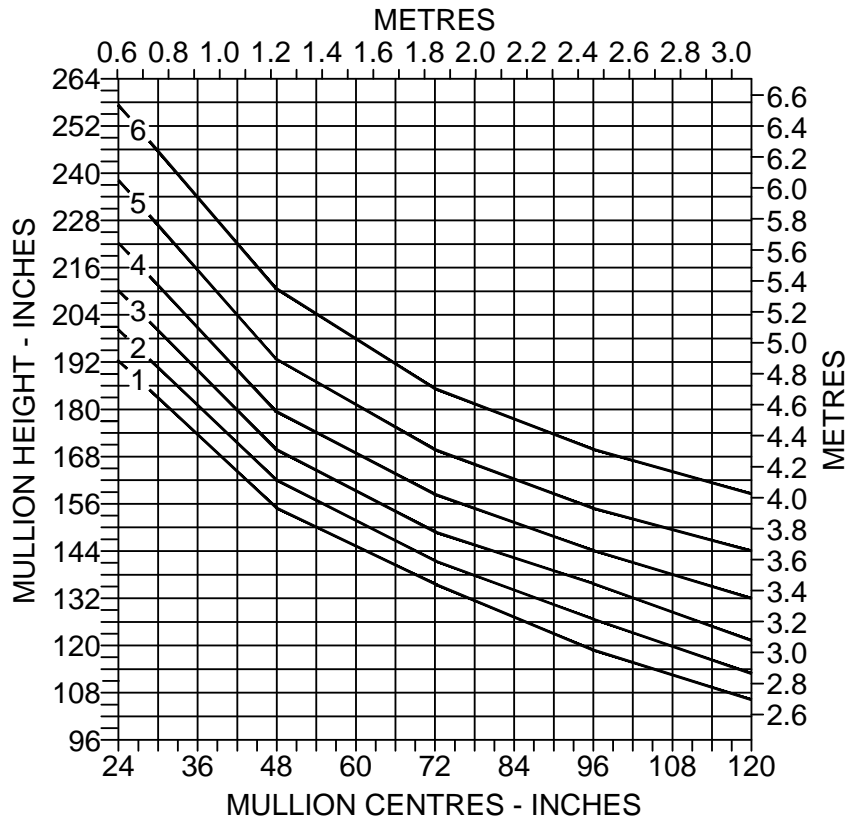

providing innovative solutions that meet client needs.

45 SERIES CURTAINWALL WIND LOAD CHARTS


E11

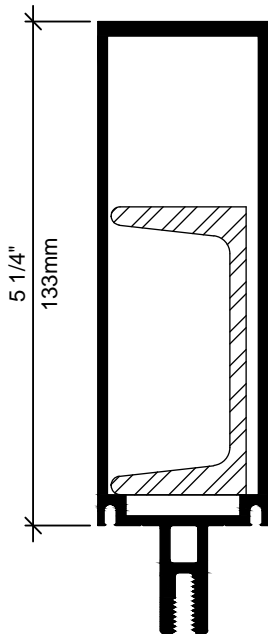

D4540

(C/W C3 X 4.1)

- ① - 1.92 kPa (40 PSF)
- ② - 1.68 kPa (35 PSF)
- ③ - 1.44 kPa (30 PSF)
- ④ - 1.20 kPa (25 PSF)
- ⑤ - .96 kPa (20 PSF)
- ⑥ - .72 kPa (15 PSF)

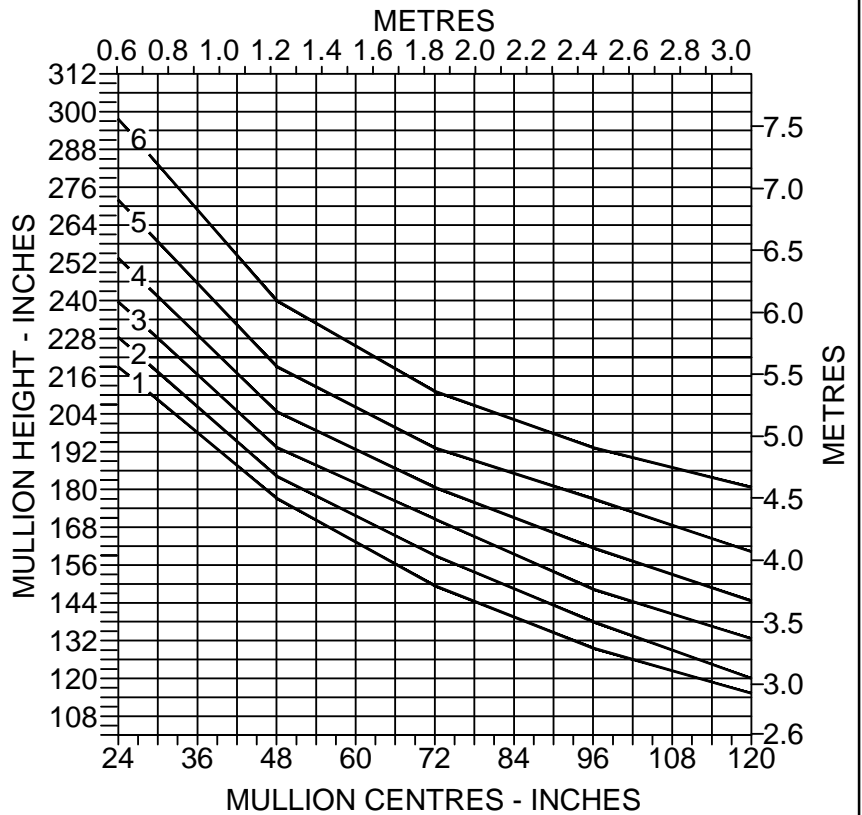

DEFLECTION CRITERION: L/175
OR L/240+1/4"



providing innovative solutions that meet client needs.